

CLARIFLOW® WATER SERVICE GRADE

Hydrophilic Polyethersulfone (PES) Membrane for Cost-Effective Water Purification



Clariflow Water Service Grade cartridges are cost-effective alternatives to Clariflow Electronics and General Grade cartridges for the filtration of a variety of aqueous based liquids.

The Water Service cartridge is built around a unique polyethersulfone (PES) membrane that is inherently hydrophilic, and so does not contain added surfactants or wetting agents. As such, it is known for clean filtrates, and also offers competitive flow rates, extended service life, and excellent resistance to hydrolysis.

Water Service cartridges are fabricated under cleanroom conditions, and each electronics grade (WE) version is pre-flushed with deionized water and integrity tested before shipment.

BENEFITS

- Reliable and cost-effective to reduce expenses
- Broad chemical compatibility allows use in most applications
- Good resistance to hydrolysis allows extended use in UPW systems
- High flow rate / low differential pressure reduces system wear and tear

APPLICATIONS

- Deionized and RO Water Filtration
- Chemical Filtration
- Liquid Clarification
- Recirculating Liquids
- Wine and Beer Clarification
- Juices
- Bottled Water

SPECIFICATIONS

LIQUID FLOW RATES*

0.04 µm	0.7 gpm/psid (3.84 lpm/100 mbar)
0.1 µm	1.3 gpm/psid (7.14 lpm/100 mbar)
0.2 µm	2.6 gpm/psid (14.27 lpm/100 mbar)
0.45 µm	3.8 gpm/psid (20.86 lpm/100 mbar)

*For fluids with viscosity of 1 cP [per 10-inch (250 mm) cartridge equivalent]

MATERIALS OF CONSTRUCTION

Membrane:	Polyethersulfone
Support Layers:	Polypropylene
Structure:	Polypropylene

All components meet USP-XXIV Class VI-121°C criteria and are thermally bonded to assure integrity and reduce extractables.

MAXIMUM DIFFERENTIAL PRESSURE

Forward:	80 psid (5.5 bar) @ 75°F (24°C)
	40 psid (2.8 bar) @ 180°F (82°C)
Reverse:	50 psid (3.4 bar) @ 75°F (24°C)

CHEMICAL COMPATIBILITY

Cartridges are chemically compatible with most ultra-pure chemicals, solvents and sanitizing agents.

INTEGRITY TEST VALUES (ELECTRONICS WE GRADE ONLY)

FILTER RATING	MINIMUM WATER BUBBLE POINT*		DIFFUSIONAL FLOW	TEST PRESSURE	
	psig	bar		cc/min	psig
µm					
0.04	45	3.1	≤35	55	3.8
0.1	70	4.8	≤50	55	3.8
0.2	40	2.8	≤30	32	2.2
0.45	30	2.1	≤30	24	1.7

*Tested in a 60/40 IPA/DI Water

BULK PACKAGING


Bulk packaged in case quantities to reduce material disposal.

10"	28 per carton
20"	12 per carton
30"	12 per carton
40"	9 per carton

CLARIFLOW® WATER SERVICE GRADE


Hydrophilic Polyethersulfone (PES) Membrane for Cost-Effective Water Purification

PERFORMANCE ATTRIBUTES

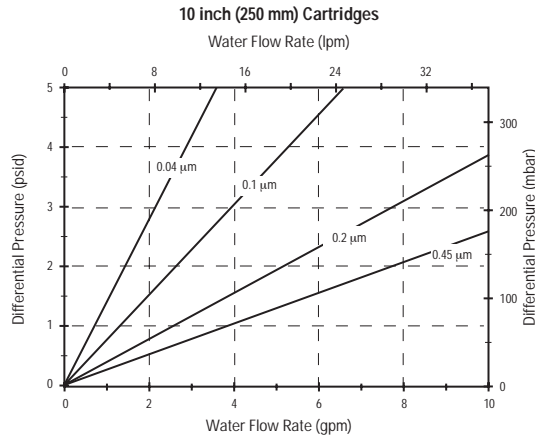

ORDERING INFORMATION

Each cartridge is identified with a product number, pore size, and lot number for traceability.

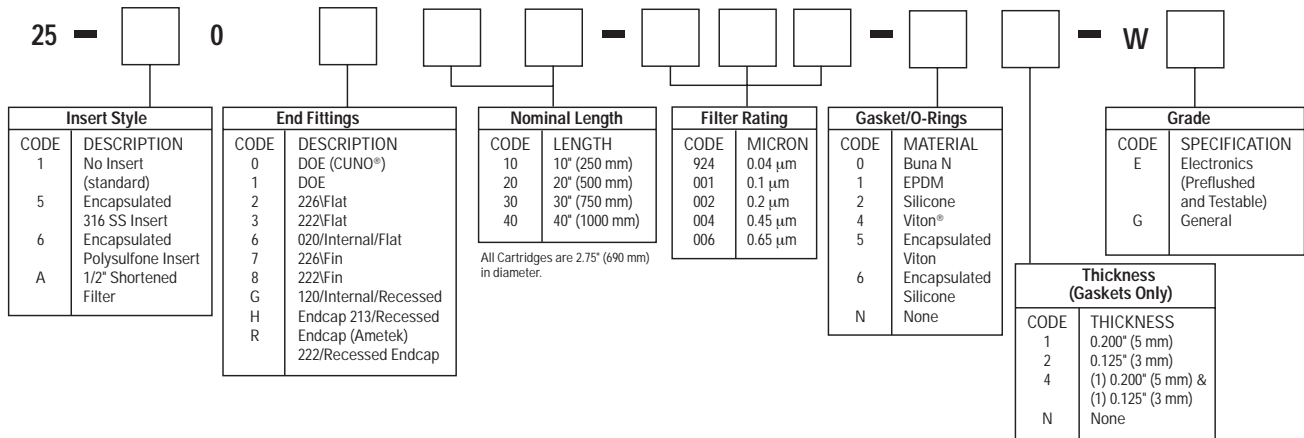

TECHNICAL SUPPORT and PRODUCT ORDERING

PTI Advanced Filtration provides unsurpassed product consistency and cost-efficiency for our customers. Our experienced professionals can help you select the right solution for your application. For more information or to place an order, contact your local distributor.

PTI designs and manufactures an extensive line of innovative solutions for specific applications in Biopharmaceutical, Dialysis, Microelectronics, Food & Beverage, Industrial and Chemical industries.

DISTRIBUTED BY:



: 22/869/5: 95'qt '742/: : : /7773

♦♦♦♦

Clariflow is a registered trademark of PTI.
 Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc.
 Cuno is a registered trademark of Cuno Inc.
 © 2003 PTI Advanced Filtration Inc.